


Top view of fourth arm vent fixing holes

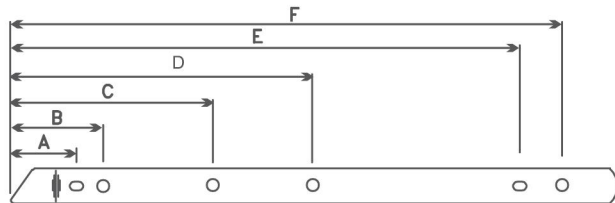

Part & Product Specification


| Size | Length | Opening angle | Max weight in kg | Vent max. height | Vent min. height |
|------|--------|---------------|------------------|------------------|------------------|
| 22"  | 565mm  | 45°           | 75               | 1500mm           | 1090mm           |
| 26"  | 683mm  | 20°           | 100              | 2000mm           | 1270mm           |

Fixing Hole Details

| SIZE: 22" |        |       |       |         |         |      |       |         |       |
|-----------|--------|-------|-------|---------|---------|------|-------|---------|-------|
| A         | B      | C     | D     | E       | F       | H    | J     | K       | L     |
| 35mm      | 49.5mm | 100mm | 238mm | 352.5mm | 365.5mm | 36mm | 288mm | 454.5mm | 565mm |

| SIZE: 26" |        |       |       |       |         |      |       |       |       |
|-----------|--------|-------|-------|-------|---------|------|-------|-------|-------|
| A         | B      | C     | D     | E     | F       | H    | J     | K     | L     |
| 35mm      | 49.5mm | 100mm | 333mm | 401mm | 413.5mm | 36mm | 355mm | 620mm | 683mm |

Underside of channel fixing holes

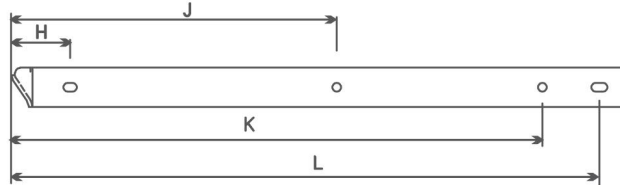

NOTE: FIXING HOLES ARE LETTERED CONSECUTIVELY FROM END CAP END

MIN/MAX WORKING  
CLEARANCE

