



Top view of fourth arm vent fixing holes

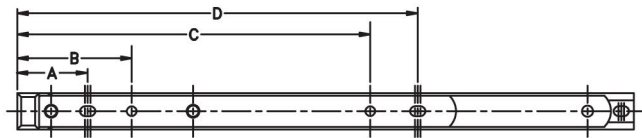

Underside of channel fixing holes

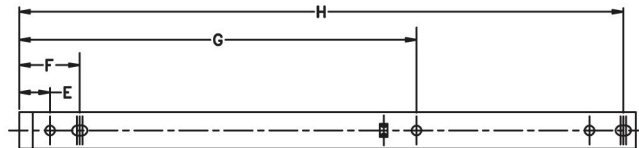


NOTE: FIXING HOLES ARE LETTERED CONSCUTIVELY FROM END CAP END

Part & Product Specification

| Size | Length | Opening Angle | Max Weight In Kg | Vent Max. Height | Vent Max. Width |
|------|--------|---------------|------------------|------------------|-----------------|
| 12"  | 311 mm | 86°           | 24               | 1200 mm          | 750 mm          |
| 16"  | 406 mm | 83°           | 24               | 1300 mm          | 950 mm          |

MIN/MAX WORKING CLEARANCE



Fixing hole details

| Size | Stack Height     | Vent Fixing Holes |          |          |   | Frame Fixing Holes |         |          |          |
|------|------------------|-------------------|----------|----------|---|--------------------|---------|----------|----------|
|      |                  | A                 | B        | C        | D | E                  | F       | G        | H        |
| 12"  | 13/14 & 16/17 mm | 36 mm             | 58.2 mm  | 202.7 mm | - | 15.5 mm            | 30.5 mm | 199.7 mm | 305.2 mm |
| 16"  | 13/14 & 16/17 mm | 36.2 mm           | 139.9 mm | 271.9 mm | - | 15.5 mm            | 30.5 mm | 308.7 mm | 407.6 mm |